


CS325H


3000pcs/reel

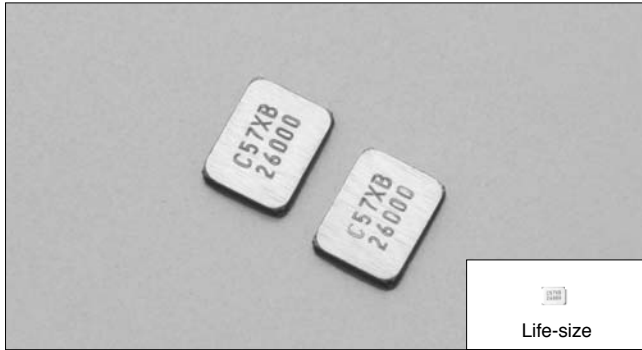


FEATURES

- 7 Wide range high Frequency stability.
- 7 High-density SMD type.
- 7 Ultra-light weight and ultraminiature size.
- 7 Reliable ceramic package and excellent environmental characteristics.
- 7 Suitable for high stability applications such as communication devices and wireless LAN.

DIMENSION [mm]

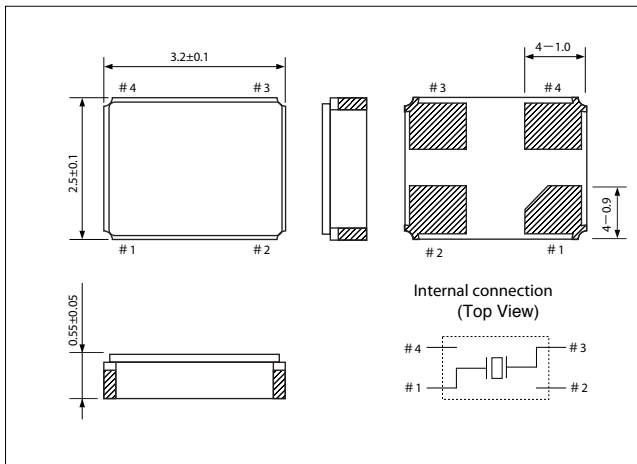

SOLDER PAD LAYOUT [mm]

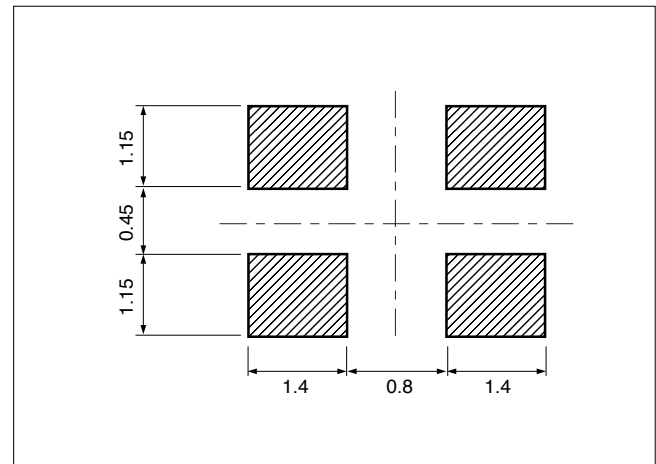

STANDARD SPECIFICATIONS

Item	Model	CS325H	Conditions
Nominal Frequency	f <sub>0</sub>	13.0MHz~54.0MHz (Fundamental)	Need to contact us for the available frequency
Frequency Tolerance	f/f <sub>0</sub>	±10ppm	at 25°C
Frequency Tolerance over Operating Temperature Range	f/f <sub>0</sub>	±10ppm	-20 ~ +70
Operating Temperature Range	T <sub>OPR</sub>	-40 ~ +85	
Storage Temperature Range	T <sub>STR</sub>	-55 ~ +125	
Motional (series) resistance	R <sub>1</sub>	Refer to the following table	at 25°C
Load capacitance	C <sub>L</sub>	16.0pF, 18.0pF	Need to specify your requirement
Shunt capacitance	C <sub>0</sub>	5.0pF Max.	
Level of drive	D <sub>L</sub>	10μW (100μW Max.)	
Insulation Resistance	I <sub>R</sub>	500MΩMin.	DC100V±15V
Aging (first year)	f/f <sub>0</sub>	±1ppm Max.	25 ±3

MOTIONAL (SERIES) RESISTANCE (R<sub>1</sub>)

Frequency Range	13.0MHz f <sub>0</sub> <16.0MHz	16.0MHz f <sub>0</sub> <20.0MHz	20.0MHz f <sub>0</sub> <30.0MHz	30.0MHz f <sub>0</sub> <54.0MHz
ESR	150ΩMax.	120ΩMax.	80ΩMax.	50ΩMax.