


SERIES RT1610



● FEATURES

- SUITABLE FOR TIME OF DAY CLOCKS
- IDEAL FOR HIGH DENSITY PACKAGING APPLICATION
- SMALL AND COMPACT PACKAGE

● SPECIFICATIONS

PARAMETER	VALUE
NOMINAL FREQUENCY	32.768 kHz
MODE OF OSCILLATION	Fundamental
FREQUENCY TOLERANCE AT 25°C	±10 ppm, ±20 ppm
FREQUENCY STABILITY OVER TEMPERATURE COEFFICIENT	-0.045 ppm / °C ²
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +125°C
AGING	±3 ppm per year max
LOAD CAPACITANCE	9 pF, 12.5 pF*
EQUIVALENT SERIES RESISTANCE	90 kΩ max
SHUNT CAPACITANCE	2 pF max
DRIVE LEVEL	0.1 μw max
SHOCK RESISTANCE	±5 ppm max 75 cm drop test onto a hard wood surface

*Note: Other values available



● PART NUMBERING SYSTEM

TYPE	-	FREQUENCY kHz	-	LOAD CAPACITANCE pF	-	TOLERANCE ppm	-	TAPE & REEL
RT1610	-	32.768	-	9 or 12.5	-	Blank for ±20 ppm 10 for ±10 ppm	-	TR

EXAMPLE: RT1610-32.768-12.5-TR

Surface Mount Tuning Fork Crystal, 1.6 mm x 1.0 mm Package, 32.768 kHz, 12.5 pF Load, ±20 ppm Tolerance, Operating Temperature from -40°C to +85°C, Tape and Reel Packaging

● **MECHANICAL SPECIFICATION**

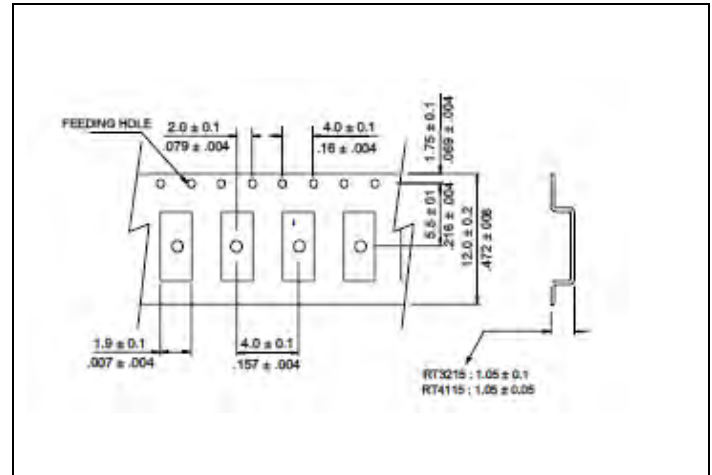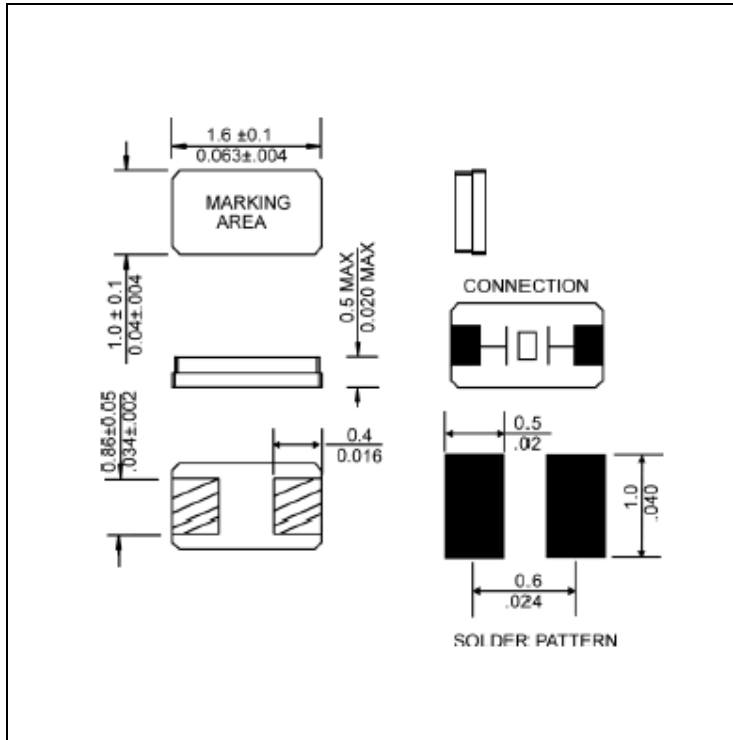

NOTE: REFER TO EIA-481 FOR DIMENSIONS

● **PACKAGING**

- 180 mm REEL DIAMETER
- 12 mm TAPE WIDTH, 4mm PITCH
- QUANTITY: 5000 PIECES PER REEL