

OZ Type 2.0 x 1.6 mm SMD Crystal Oscillator

FEATURE

- Typical 2.05 x 1.65 x 0.75 mm ceramic SMD package.
- Tight symmetry (45 to 55%) available.
- Operation voltage: 1.8V, 2.5V, 3.3V
- Tri-state enable/disable

TYPICAL APPLICATION


- WLAN/WiMax
- Mobile Phone
- DSC, Set-top Box, HDTV

Actual Size □




RoHS Compliant

DIMENSION (mm)

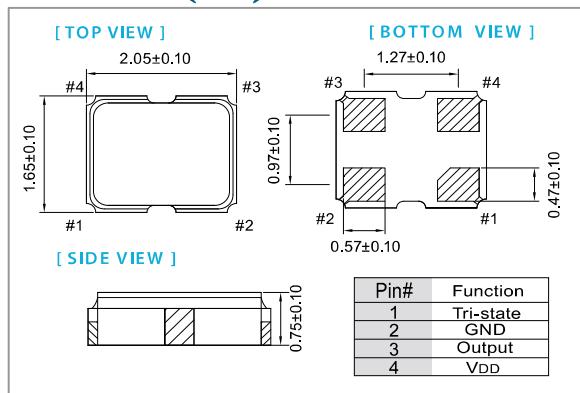

SOLDER PAD LAYOUT (mm)

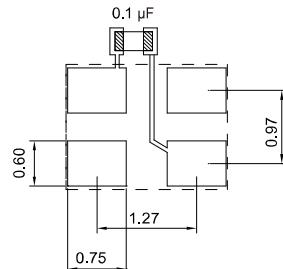

To ensure optimal oscillator performance, place a by-pass capacitor of 0.1μF as close to the part as possible between Vdd and GND pads.

ELECTRICAL SPECIFICATION

Parameter	3.3V		2.5V		1.8V		Unit
	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)	VDD-10%	VDD+10%	VDD-10%	VDD+10%	VDD-10%	VDD+10%	V
Frequency Range	1.5	50	1.5	50	1.5	50	MHz
Standard Frequency			24.26				
Supply Current	-	15	-	10	-	7	mA
Duty Cycle	45	55	45	55	45	55	%
Output Level (CMOS)							
Output High (Logic "1")	2.97	-	2.25	-	1.62	-	V
Output Low (Logic "0")	-	0.33	-	0.25	-	0.18	
Transition Time: Rise/Fall Time⁺							
1.5 MHz ≤ Fo < 20 MHz	-	4	-	4	-	5	nSec
20 MHz ≤ Fo ≤ 50 MHz	-	3	-	3	-	4	
Start Time	-	2	-	2	-	2	mSec
Tri-State (Input to Pin 1)							
Enable (High voltage or floating)	2.31	-	1.75	-	1.26	-	V
Disable (Low voltage or GND)	-	0.99	-	0.75	-	0.54	
Period Jitter (pk-pk)	-	40	-	40	-	40	pSec
RMS Phase Jitter (Integrated 12 KHz~20 MHz)	-	1	-	1	-	1	pSec
Standby Current	-	10	-	10	-	10	μA
Aging (@ 25 °C 1st year)	-	±3	-	±3	-	±3	ppm
Storage Temp. Range	-55	125	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position

+ Transition times are measured between 10% and 90% of VDD, with an output load of 15 pF.

FREQ. STABILITY vs. TEMP. RANGE

Temp(°C)	ppm	±20	±25	±50
-10 ~ +60	○	○	○	
-20 ~ +70	△	○	○	
-40 ~ +85	×	△	○	
-40 ~ +125	×	×	○	

*O: Available △: Conditional X: Not available

*Inclusive of calibration @ 25 °C, operating temperature range, input Voltage variation, load variation, aging (1st year), shock, and vibration

