

SMD Oscillators- Differential Output 7.0 x 5.0 x 1.3 mm BE Series

Features

- Fundamental solution.
- 3.3V and 2.5V operation available.
- LVDS output, output frequencies 25 MHz to 200 MHz.
- Excellent low phase noise and jitter.
- Tri-State function available.
- Applications : Fibre Channel, Gigabit Ethernet, Serial ATA, Serial Attached SCSI, PCI-Express, SDH / SONET.
- RoHS Compliant / Pb Free.




Electrical Specifications

Item / Type	BE
Output Type	LVDS
Output Load	100 Ω
Oscillation Mode	Fundamental
Supply Voltage	2.5 V , 3.3 V
Frequency Range	25 ~ 200 MHz
Overall Frequency Stability *	± 50 ppm
Operating Temperature Range	- 40 ~ + 85 $^{\circ}$ C
Storage Temperature Range	- 55 ~ + 125 $^{\circ}$ C
Voltage Vol (Min.) / Voh (Max.)	0.9 V / 1.6 V
Rise (Tr) / Fall (Tf) Time (20 % ~ 80 %)	1 ns Max.
Supply Current	80 mA Max.
Symmetry	45 ~ 55 %
Start-up Time	10 ms Max.
Phase Jitter (12 KHz ~ 20 MHz)	1 ps Max.

* Inclusive of frequency tolerance at 25 $^{\circ}$ C, variation over temperature, supply voltage variation, aging and vibration.

Dimensions

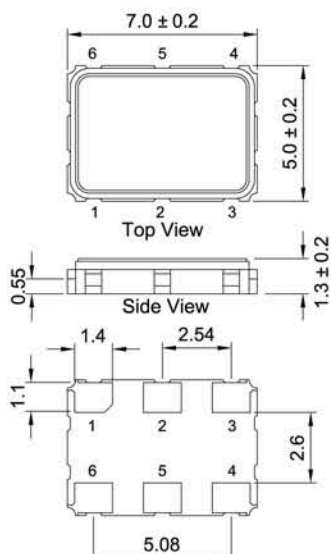

PAD FUNCTION:

- 1: ENABLE CONTROL
- 2: NC
- 3: GND
- 4: OUT
- 5: ~OUT
- 6: VDD

*:Power Supply Decoupling Capacitor is Required.

